
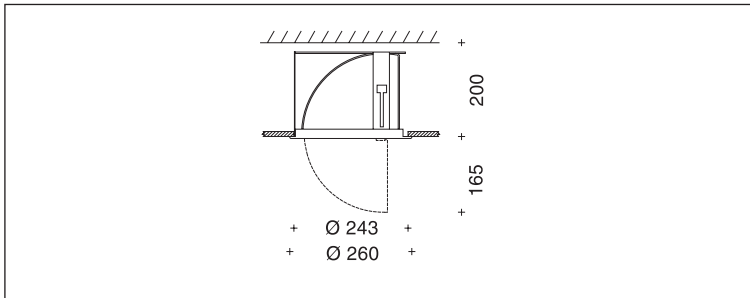


Giro vario 260/HIT Flood

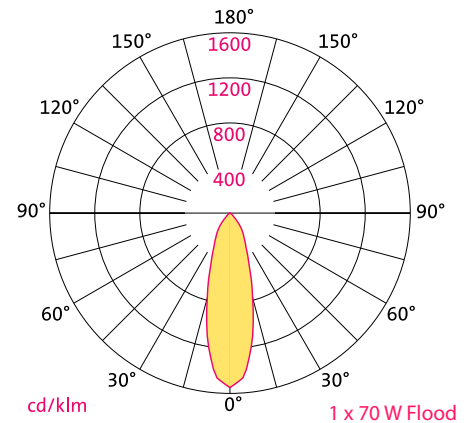

Wirkungsgrade	
η_{lB}	73 %
Anteil indirekt	0 %
Anteil direkt	100 %

Abstand (m)	Kegelbreite (m)	Beleuchtungsstärke (lx)
1.0	0.58	19419.4
2.0	1.17	4854.9
3.0	1.75	2157.7
4.0	2.33	1213.7

■ C0-C180 Ebene

Giro vario 260/HIT Flood	Art.-Nr.
1 x HIT 70 W	271311
1 x HIT 150 W	271321

Giro vario 260/HIT Spot	Art.-Nr.
1 x HIT 70 W	271291
1 x HIT 150 W	271371

HIT	G12	70 W 150 W	230 V	MR
UV	HIT UV			
350° 90°	243	200	55	s.u. kg
IP 20			EN 60598	CE