
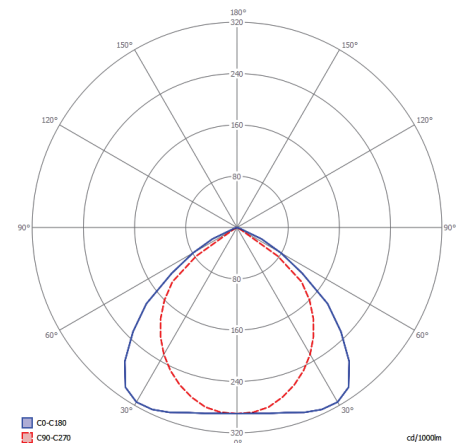


1x49W AC

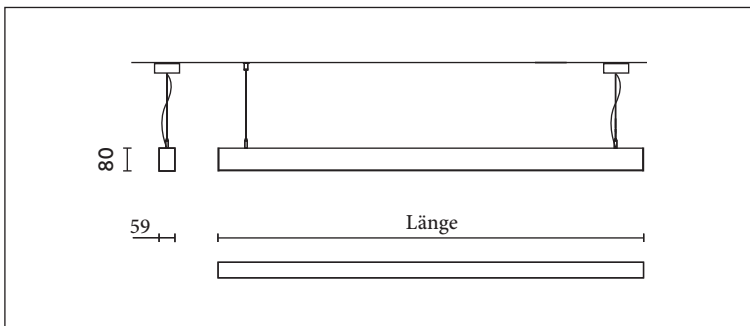

1x49W R7

K5580P Pendelleuchte				
	Länge	LA-Länge	prismatisch Art.-Nr.	R7 (BAP) Art.-Nr.
1 x T5 21 W	920	880	120089	120174
1 x T5 28 W	1220	1180	120090	120175
1 x T5 35 W	1520	1480	120091	120176
1 x T5 39 W	920	880	120170	120092
1 x T5 54 W	1220	1180	120171	120093
1 x T5 49 W	1520	1480	120172	120094
1 x T5 80 W	1520	1480	120173	120094

Wirkungsgrade		
	AC	R7
$\eta_{LE}$	70 %	69%
Anteil indirekt	0 %	0%
Anteil direkt	100 %	100%

Pendelleuchte für Leuchtstofflampen T5. Leuchtenkörper aus stranggepresstem Aluminium in titansilber. Hochglänzender Aluminium-Parabolastrer, Leuchtdichte begrenzt auf 1000 cd/m<sup>2</sup> oberhalb 65° rundum nach EN 12464 oder Prismenprofilabdeckung. Stahlseilabhängung 1 m mittels Schnellabhänger. Transparente Zuleitung 3 x 0,75 mm<sup>2</sup>. Deckenbaldachin quadratisch titansilber.

Optional:

- Satinée-Abdeckung
- Opale Abdeckung

Blendungsbewertung			
Reflexionsgrade		0,7/0,5/0,2	
		AC	R7
1 x	UGR quer	25,5	20,9
21 W	UGR parallel	23,2	18,9
1 x	UGR quer	24,4	20,9
28 W	UGR parallel	22,1	18,9
1 x	UGR quer	24,5	21,0
35 W	UGR parallel	22,2	19,0
1 x	UGR quer	26,8	22,6
39 W	UGR parallel	24,5	20,6
1 x	UGR quer	26,3	22,8
54 W	UGR parallel	24,0	20,9
1 x	UGR quer	25,4	21,9
49 W	UGR parallel	23,1	20,0
1 x	UGR quer	26,6	23,1
80 W	UGR parallel	24,3	21,2
L ab 65°			